

Clip-on Mounting

• SEE PAGE 6 FOR HOW TO ORDER
• SEE PAGE 7 FOR SAMPLE REQUEST




250K4C070 PERPENDICULAR CONTACT

Compression Force

	25% Compression (0.180")	50% Compression (0.120")
Standard .005" Thk.	*	*
"TF" Style .003" Thk.	*	*

* Note: Consult factory for performance data.

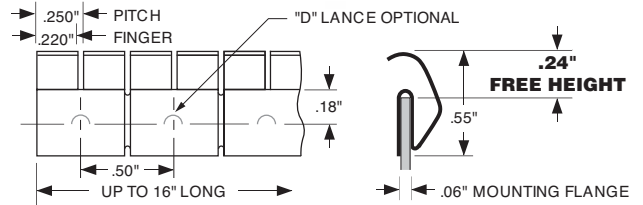


250C040 LOW PROFILE

Compression Force

	25% Compression (0.045")	50% Compression (0.030")
Standard .006" Thk.	15 lbs/ft	83 lbs/ft
"TF" Style .0035" Thk.	6.6 lbs/ft	30 lbs/ft

Notes: Optional lance available as shown.
(SS) Also available in Stainless Steel (SS250C040)

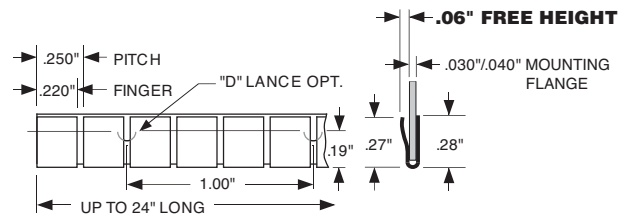


125LP55C070 LOW PROFILE

Compression Force

	25% Compression (0.060")	50% Compression (0.040")
Standard .0035" Thk.	9.6 lbs/ft	32 lbs/ft
"TF" Style .0025" Thk.	5.7 lbs/ft	17 lbs/ft

Note: See page 4 for available lances.

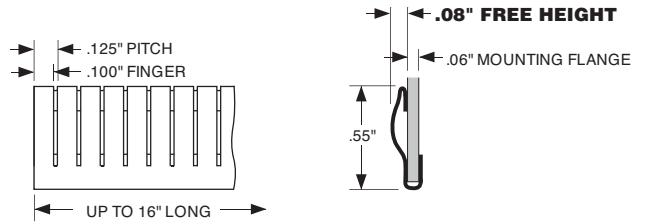


125LP75C070 LOW PROFILE

Compression Force

	25% Compression (0.090")	50% Compression (0.060")
Standard .0035" Thk.	7.3 lbs/ft	23 lbs/ft
"TF" Style .0025" Thk.	2.5 lbs/ft	8.9 lbs/ft

Note: See page 4 for available lances.

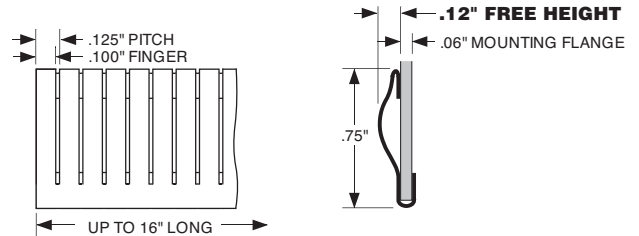


187RGCXXX CYLINDRICAL RADIUS

Compression Force

	25% Compression (0.060")	50% Compression (0.040")
Standard .005" Thk.	12 lbs/ft	93 lbs/ft

Note: See page 4 for available lances.

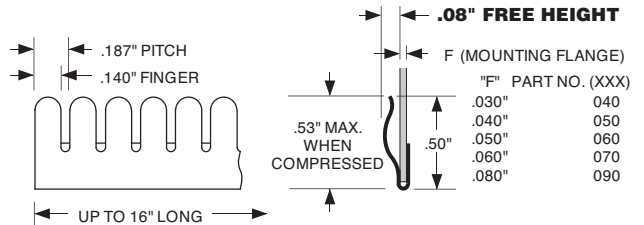


187RF2CXXX CYLINDRICAL RADIUS

Compression Force


	25% Compression (0.060")	50% Compression (0.040")
Standard .005" Thk.	23 lbs/ft	140 lbs/ft

Note: See page 4 for available lances.

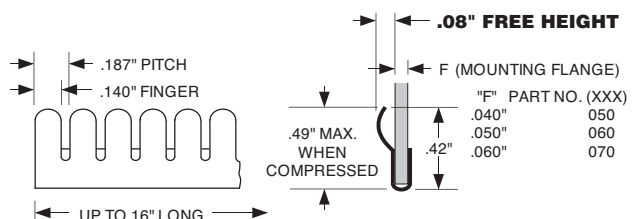

Clip-on Mounting

• SEE PAGE 6 FOR HOW TO ORDER
• SEE PAGE 7 FOR SAMPLE REQUEST

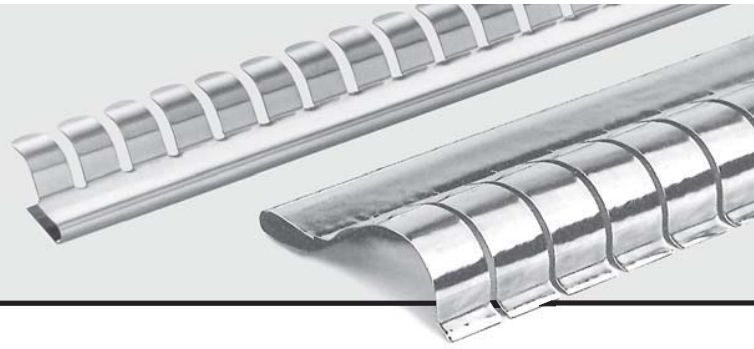


182RF9CXXXL CYLINDRICAL RADIUS

Compression Force

	25% Compression (0.075")	50% Compression (0.050")
Standard .005" Thk.	14 lbs/ft	49 lbs/ft
"TF" Style .003" Thk.	4.5 lbs/ft	22 lbs/ft

Note: Non-standard lance location(s).

(SS) Also available in Stainless Steel (SS182RF9CXXXL)

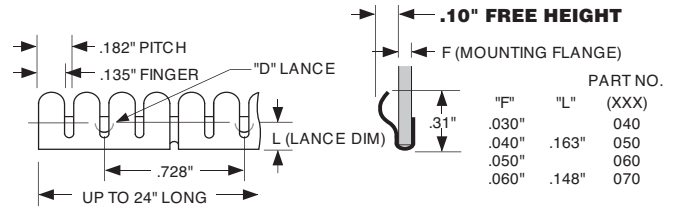


187RF1CXXX CYLINDRICAL RADIUS

Compression Force

	25% Compression (0.090")	50% Compression (0.060")
Standard .005" Thk.	12 lbs/ft	84 lbs/ft
"TF" Style .0035" Thk.	*	*

Notes: See page 4 for available lances.

* Consult factory for performance data.

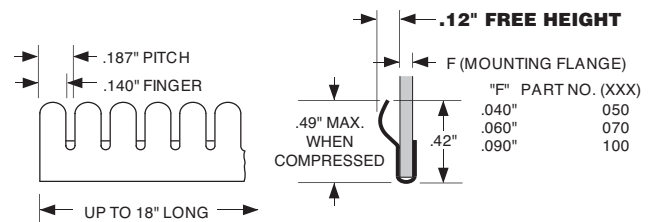


187RF3CXXX CYLINDRICAL RADIUS

Compression Force

	25% Compression (0.105")	50% Compression (0.070")
Standard .005" Thk.	18 lbs/ft	N/A
"TF" Style .0035" Thk.	*	*

Notes: See page 4 for available lances.

* Consult factory for performance data.

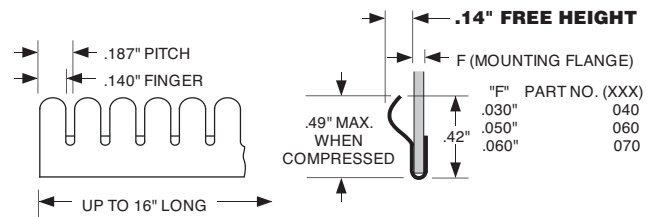


187RF4C070 CYLINDRICAL RADIUS

Compression Force

	25% Compression (0.120")	50% Compression (0.080")
Standard .005" Thk.	11 lbs/ft	69 lbs/ft
"TF" Style .0035" Thk.	6.9 lbs/ft	21 lbs/ft

Note: See page 4 for available lances.

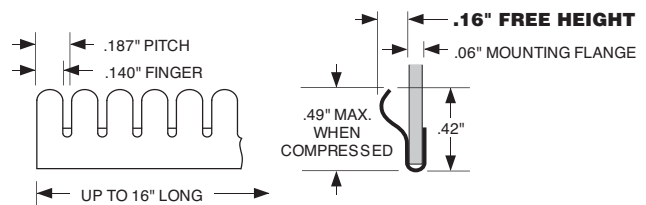


182RF8CXXXL CYLINDRICAL RADIUS

Compression Force

	25% Compression (0.158")	50% Compression (0.105")
Standard .005" Thk.	3.5 lbs/ft	16 lbs/ft

Note: Non-standard lance location(s).

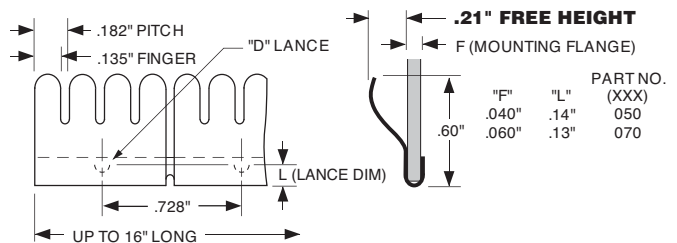


375CXXX STRIP GASKETS

Compression Force

	25% Compression (0.195")	50% Compression (0.130")
Standard .005" Thk.	17 lbs/ft	43 lbs/ft

Note: Drawing shown at reduced scale.

See page 4 for available lances.

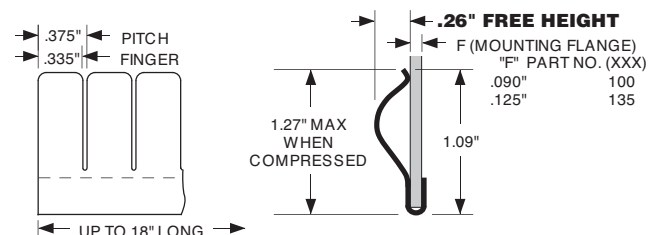

Clip-on Mounting

• SEE PAGE 6 FOR HOW TO ORDER
• SEE PAGE 7 FOR SAMPLE REQUEST




250KC070L REVERSE BEND CONTACTS

Compression Force

	25% Compression (0.150")	50% Compression (0.100")
Standard .005" Thk.	5 lbs/ft	15 lbs/ft

Note: Non-standard lance location(s). Also available in 25 ft. rolls.
Scores for break off between 1/2" increments optional.

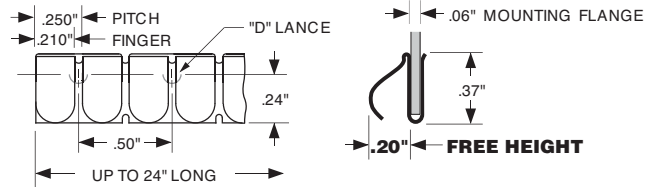


250K2C070L REVERSE BEND CONTACTS

Compression Force

	25% Compression (0.203")	50% Compression (0.135")
Standard .005" Thk.	5 lbs/ft	15 lbs/ft

Note: Non-standard lance location(s). Also available in 25 ft. rolls.
Scores for break off between 1/2" increments optional.

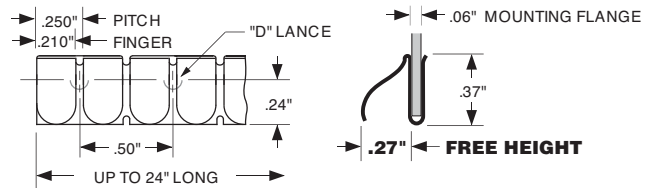


187KC080 REVERSE BEND CONTACTS

Compression Force

	25% Compression (0.188")	50% Compression (0.125")
Standard .005" Thk.	12 lbs/ft	44 lbs/ft

Note: See page 4 for available lances.

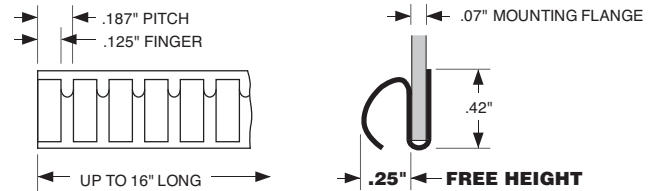


165TC070 TWISTED CONTACTS

Compression Force

	25% Compression (0.053")	50% Compression (0.035")
Standard .003" Thk.	10 lbs/ft	22 lbs/ft

Note: See page 4 for available lances.

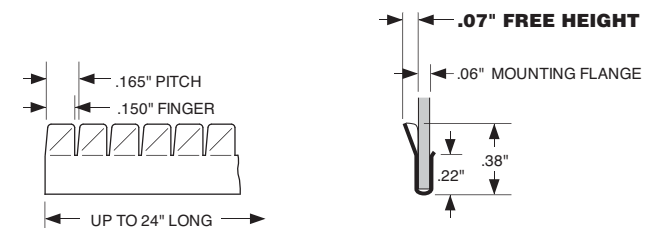


165TCXXXM TWISTED CONTACTS

Compression Force

	25% Compression (0.053")	50% Compression (0.035")
Standard .003" Thk.	10 lbs/ft	22 lbs/ft

Note: See page 4 for available lances.
* Consult factory for longer lengths.

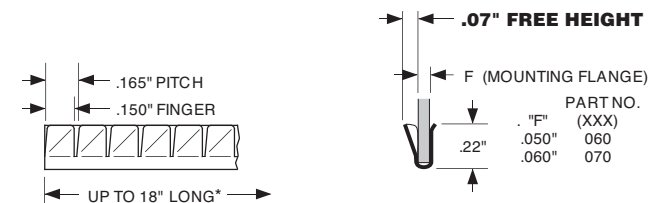


95TCXXX TWISTED CONTACTS

Compression Force

	25% Compression (0.023")	50% Compression (0.015")
Standard .003" Thk.	32 lbs/ft	48 lbs/ft

Note: Optional lance available as shown.
* Consult factory for longer lengths.

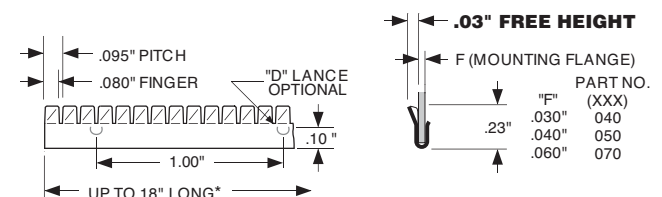

Clip-on Mounting

• SEE PAGE 6 FOR HOW TO ORDER
• SEE PAGE 7 FOR SAMPLE REQUEST




95TCXXM

TWISTED CONTACTS

Compression Force

	25% Compression (0.023")	50% Compression (0.015")
Standard .003" Thk.	32 lbs/ft	48 lbs/ft

Note: Optional lance available as shown.
* Consult factory for longer lengths.

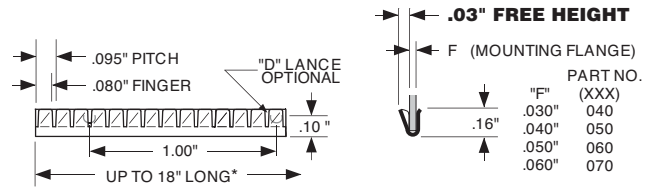


125M42CXXX

NO-SNAG FINGERS

Compression Force

	25% Compression (0.090")	50% Compression (0.060")
Standard .0035" Thk.	23 lbs/ft	55 lbs/ft
"TF" Style .0025" Thk.	12 lbs/ft	28 lbs/ft

* Note: See page 4 for available lances.

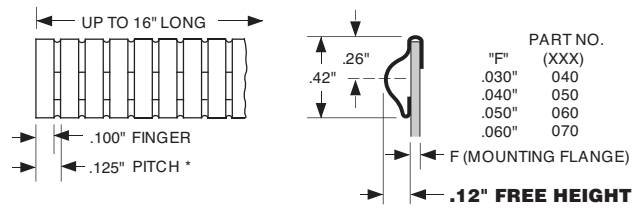


250M42CXXX

NO-SNAG FINGERS

Compression Force

	25% Compression (0.090")	50% Compression (0.060")
Standard .0035" Thk.	29 lbs/ft	69 lbs/ft
"TF" Style .0025" Thk.	15 lbs/ft	35 lbs/ft

* Note: See page 4 for available lances.

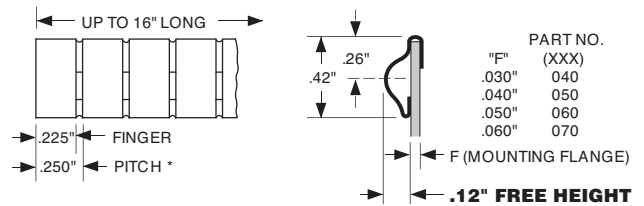

375P64C070

SOFT NO-SNAG FINGERS

Compression Force

	25% Compression (0.165")	50% Compression (0.110")
Standard .0035" Thk.	18 lbs/ft	36 lbs/ft

Note: See page 4 for available lances.

