


# Special Mounting



• SEE PAGE 6 FOR HOW TO ORDER  
• SEE PAGE 7 FOR SAMPLE REQUEST

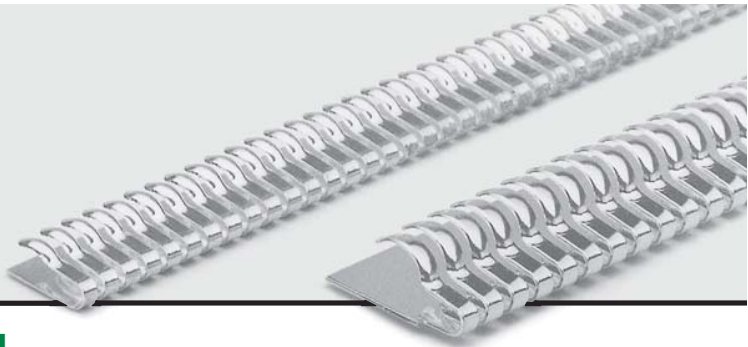

## 60RC REVERSE BEND SPHERICAL



### Compression Force

	25% Compression (0.068")	50% Compression (0.045")
Standard .004" Thk.	7 lbs/ft	10 lbs/ft



## 75RC REVERSE BEND SPHERICAL



Standard .006" Thk.



## 93R1D REVERSE BEND SPHERICAL

### Compression Force



	25% Compression (0.120")	50% Compression (0.080")
Standard .010" Thk.	15 lbs/ft	47 lbs/ft



## 60D REVERSE BEND CONTACTS

### Compression Force



	25% Compression (0.053")	50% Compression (0.035")
Standard .004" Thk.	18 lbs/ft	41 lbs/ft



## 127A REVERSE BEND CONTACTS



### Compression Force

	25% Compression (0.068")	50% Compression (0.045")
Standard .005" Thk.	18 lbs/ft	49 lbs/ft




## 187RD2 REVERSE BEND CONTACTS

Standard .005" Thk.



# Special Mounting


• SEE PAGE 6 FOR HOW TO ORDER  
• SEE PAGE 7 FOR SAMPLE REQUEST

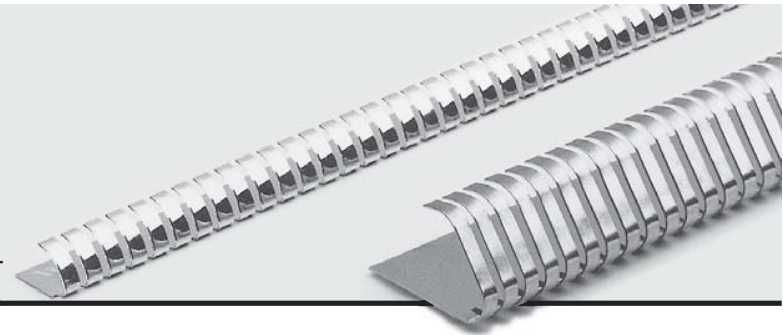

## 134B REVERSE BEND CONTACTS

### Compression Force


	25% Compression (0.098")	50% Compression (0.065")
Standard .010" Thk.	4 lbs/ft	96 lbs/ft

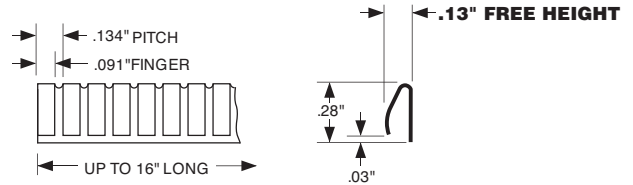

## 145A REVERSE BEND CONTACTS

### Compression Force


	25% Compression (0.098")	50% Compression (0.065")
Standard .010" Thk.	20 lbs/ft	61 lbs/ft

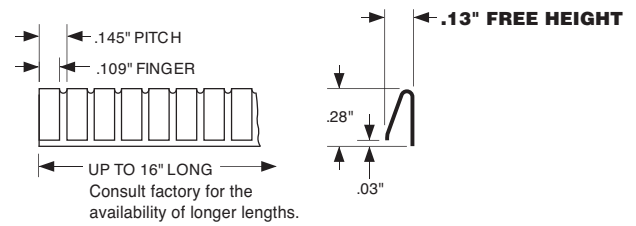

## 134C REVERSE BEND CONTACTS


### Compression Force

	25% Compression (0.150")	50% Compression (0.100")
Standard .010" Thk.	18 lbs/ft	160 lbs/ft
"TF" Style .005" Thk.	7 lbs/ft	27 lbs/ft

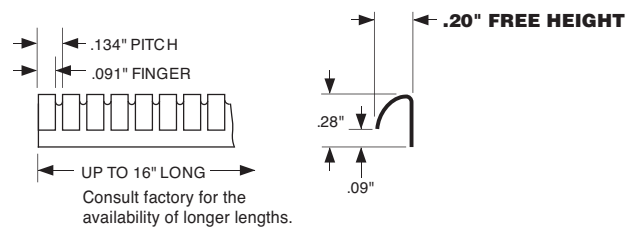

## 187RD REVERSE BEND CONTACTS


Standard .005" Thk.

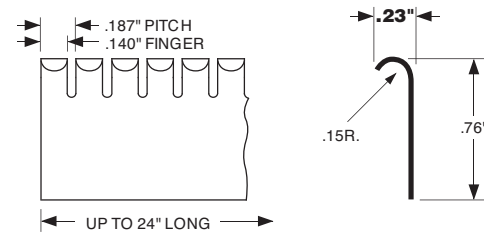

## 187H REVERSE BEND CONTACTS

### Compression Force


	25% Compression (0.210")	50% Compression (0.140")
Standard .006" Thk.	5.0 lbs/ft	15 lbs/ft

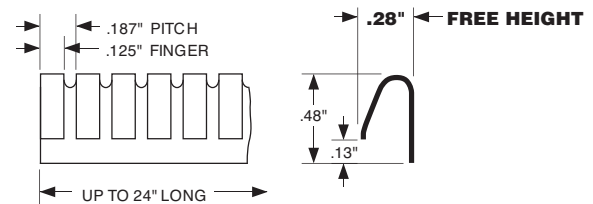

## 134D REVERSE BEND CONTACTS


### Compression Force

	25% Compression (0.330")	50% Compression (0.220")
Standard .010" Thk.	16 lbs/ft	46 lbs/ft

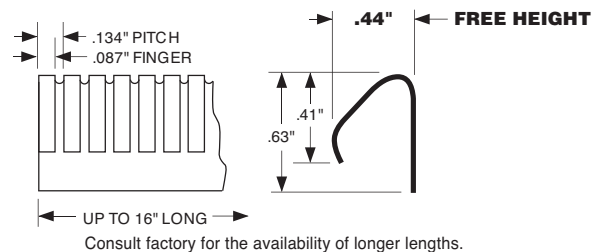

# Special Mounting


• SEE PAGE 6 FOR HOW TO ORDER  
• SEE PAGE 7 FOR SAMPLE REQUEST

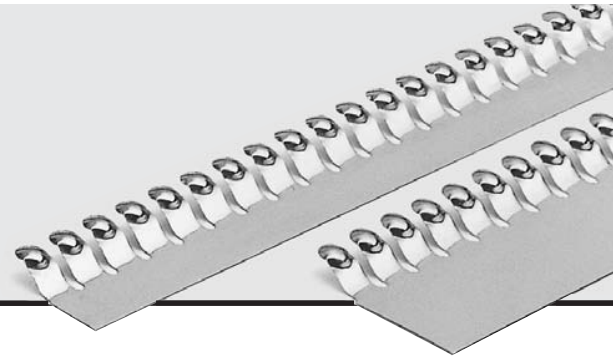

## 60R

### SPHERICAL RADIUS


Standard .004" Thk.

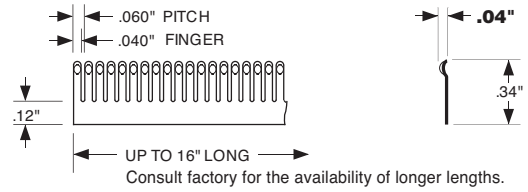

## 75RF

### SPHERICAL RADIUS


Standard .006" Thk.

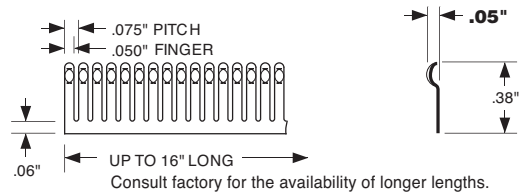

## 75RE

### SPHERICAL RADIUS


Standard .006" Thk.

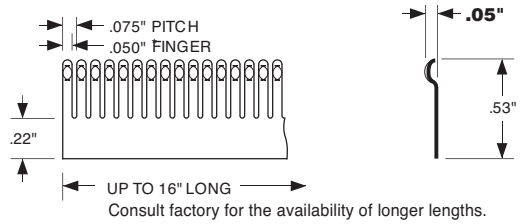

## 187RB1

### SPHERICAL RADIUS

Standard .005" Thk.

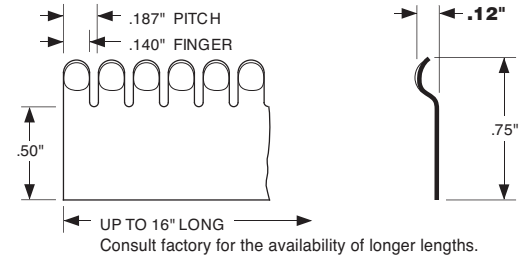


## 187RB

### CYLINDRICAL RADIUS

#### Compression Force


	25% Compression (0.068")	50% Compression (0.045")
Standard .005" Thk.	3.0 lbs/ft	6.0 lbs/ft

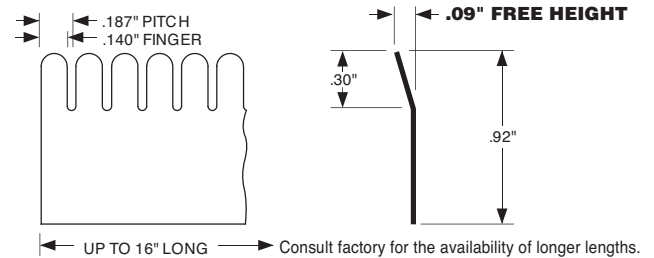

## 187RC

### CYLINDRICAL RADIUS

Standard .005" Thk.

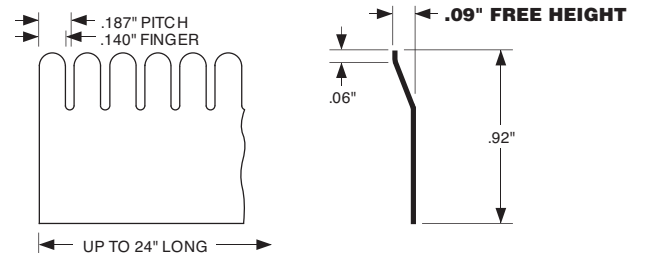

# Special Mounting


• SEE PAGE 6 FOR HOW TO ORDER  
• SEE PAGE 7 FOR SAMPLE REQUEST



## 187RJ

### CYLINDRICAL RADIUS

Standard .005" Thk.

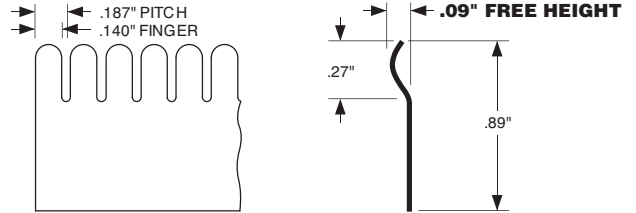


UP TO 16" LONG → Consult factory for the availability of longer lengths.

## 187RA

### CYLINDRICAL RADIUS

#### Compression Force

	25% Compression (0.090")	50% Compression (0.060")
Standard .005" Thk.	8.0 lbs/ft	37 lbs/ft

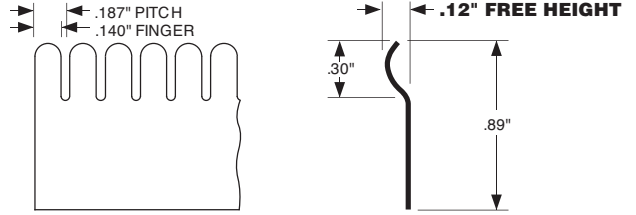


UP TO 16" LONG → Consult factory for the availability of longer lengths.

## 187R<sub>2</sub>A

### CYLINDRICAL RADIUS

#### Compression Force

	25% Compression (0.090")	50% Compression (0.060")
Standard .004" Thk.	17 lbs/ft	73 lbs/ft

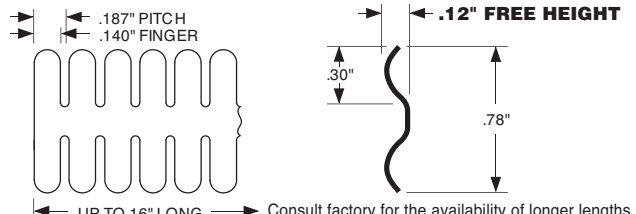


UP TO 16" LONG → Consult factory for the availability of longer lengths.

## 375B

### CYLINDRICAL RADIUS

#### Compression Force

	25% Compression (0.165")	50% Compression (0.110")
Standard .004" Thk.	18 lbs/ft	48 lbs/ft

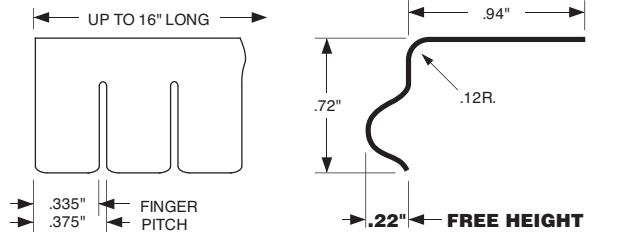


## 375A

### STRIP GASKETS

#### Compression Force

	25% Compression (0.195")	50% Compression (0.130")
Standard .005" Thk.	15 lbs/ft	41 lbs/ft

Note: Drawing shown at reduced scale.

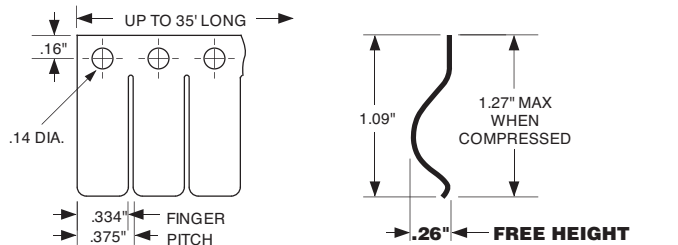

## 500A

### STRIP GASKETS

#### Compression Force

	25% Compression (0.308")	50% Compression (0.205")
Standard .007" Thk.	16 lbs/ft	32 lbs/ft

Note: Drawing shown at reduced scale.

